



MID/HIGH RH-STS MH

Exclusive CoEntrant Design

Provides true point source performance with outstanding resolution and tonal clarity.

140 dB SPL Level Long-Throw Design

Multiple high-power drivers, CoEntrant design produce a program output SPL of 140 dB.

Tightly Controlled Long-Throw Coverage


CoEntrant design provides tightly controlled 60° x 30° coverage with constant Q through crossover.

Six Extended Range 1 inch HF Drivers

Six 1" drivers, phase coherent couplers provide high level, crystal clear highs out to 17kHz.

True Point Source Performance

The unique CoEntrant design of these loudspeakers ensures proper signal alignment and constant directivity and Q through crossover. This enables them to provide tonal balance and resolution not attainable from other designs. Dual 6.5" carbon fibre mid range drivers, an extended-range, high-frequency driver and a heavy-duty 15" woofer complete the picture. They add virtually distortion free performance from 40Hz to 17kHz to these loudspeakers credentials.

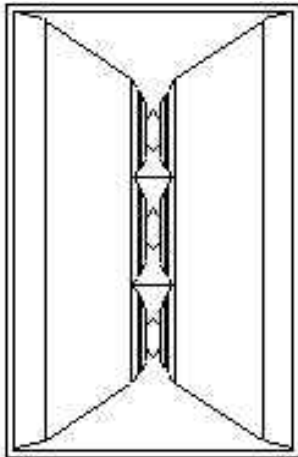

SENSITIVITY:	110dB (1w/1m) @ 500Hz 116dB (1w/1m) @ 2.5kHz
MAXIMUM SPL:	140dB
DISPERSION:	60° H by 40° V
FREQ. RESPONSE:	250Hz to 17kHz
HIGH DRIVER:	Six CD1-116 1" drivers, 2.7Ω; 300W RMS, 540W program
MID DRIVER:	Six 6.5" cone drivers, 2.7Ω; 780W RMS, 1560W program
CROSSOVER POINTS:	250Hz and 2.2kHz
ENCLOSURE:	Trapezoidal, 13 ply hardwood, heavily braced
GRILLE:	Perforated metal grille with moisture resistant foam insert
CONNECTOR:	8-pin Neutrik
FINISH:	Black carpet
AEROQUIP TRACK:	Model FT2-C3 side mounted
HARDWARE:	Handles
DIMENSIONS:	32.5"H x 21"W x 23.75"D (82.6cm x 53.3cm x 60.3cm)
NET WEIGHT:	158 Lbs. (71.4 Kg)